Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: CITIZEN ELECTRONICS CO., LTD.

Supplier's address: EU sales office, Stephanstraße 3, 60313 Frankfurt am Main, DE

Model identifier: CLU03J-1208C9-272H7U4

Type of light source:


Lighting technology used:	LED	Non-directional or directional:	NDLS		
Light source cap-type	Electric PAD				
(or other electric interface)					
Mains or non-mains:	NMLS	Connected light source (CLS):	No		
Colour-tuneable light source:	No	Envelope:	-		
High luminance light source:	No				
Anti-glare shield:	No	Dimmable:	Yes		
Product parameters					


Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consum mode (kWh/100 up to the nearest	0 h), rounded	24	Energy efficiency class	F		
Useful luminous indicating if it ref in a sphere (360 cone (120º) or in (90º)	fers to the flux D ^o), in a wide	2 606 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700		
On-mode po expressed in W	ower (P _{on}),	24,0	Standby power (P _{sb}), expressed in W and rounded to the second decimal	0,00		
Networked stand for CLS, express rounded to the se	ed in W and	-	Colour rendering index, rounded to the nearest integer, or the range of CRI- values that can be set	97		
Outer	Height	19	Spectral power	See image		
	Width	19	distribution in the	in last page		
without	Depth	2		Page 1 / 3		

separate control gear, lighting control parts and non- lighting control parts, if any		range 250 nm to 800 nm, at full-load	
(millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458
Parameters for LED and OLED lig	ht sources:	I	
R9 colour rendering index value	80	Survival factor	1,00
the lumen maintenance factor	0,96		
(a), , , , , , , , , , , , , , , , , , ,	<u> </u>		

(a)_{'-'} : not applicable;

(b)'-' : not applicable;



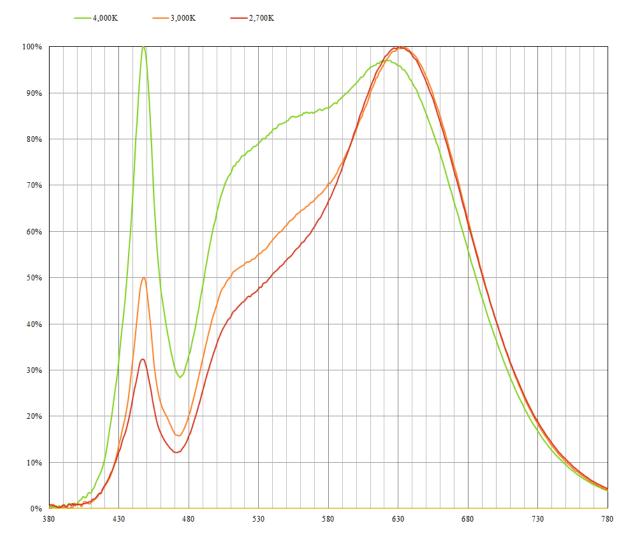

Wave length [nm]